

# Pump Stations

## PW Single Pump Station: For every application and flow rate




### Standardized Single Pump Station Features:

- Polyethylene tank construction.
- CPVC or polypropylene pump construction.
- TEFC motor comes standard.
- Level control system corrosion resistant.
- Automated features include pump on/off.
- Variety of pump flows and pressures.
- 120 volt single phase electrical operation.


### Single Pump Station Specifications:

Model	Gallons	Liters	Tank Dimensions			Horsepower & Amperage at 120 volts		Tank Inlet	Tank Outlet
			L"	W"	H"	HP	AMP		
PW-1-11	11	41.63	12	12	18	1/5	3	1"	1"
PW-1-18	18	68	18	12	18	1/5	3	1"	1"
PW-1-26	26	98.5	16	16	24	1/3	4.5	2"	1"
PW-1-28	28	106	24	18	15	3/4	8	2"	1"

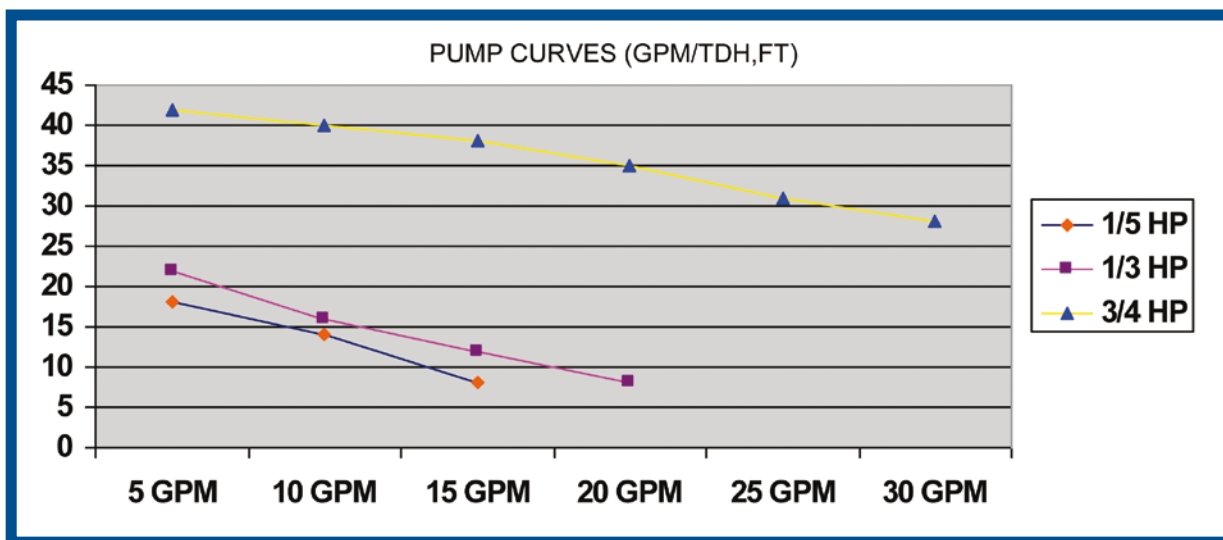

# Pump Stations

## PW Dual Pump Station: For every application and flow rate

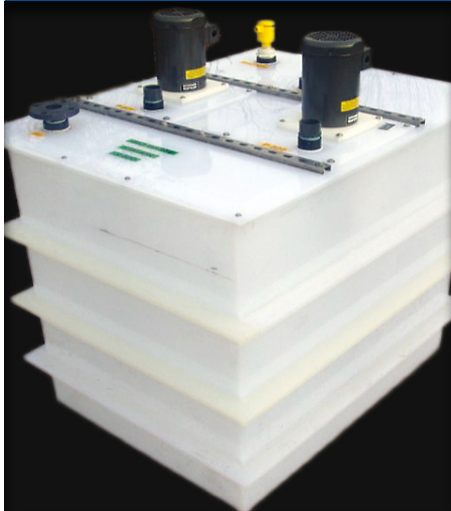

### Dual Pump Station Features:

- Polypropylene tank construction.
- CPVC or polypropylene pump construction.
- TEFC motor comes standard.
- Level control system corrosion resistant.
- Automated features include pump on/off and high level alarm with auxiliary contacts
- Variety of pump flows and pressures.
- 480 volt three phase electrical operation.

### Dual Pump Station Specifications:

Model	Gallons	Liters	Tank Dimensions			Horsepower & Amperage at 480 volts		Tank Inlet	Tank Outlet
			L"	W"	H"	HP	AMP		
PW-2-50	50	190	30	24	24	1/3	2	2"	2"
PW-2-170	170	645	36	36	36	3/4	3.2	4"	2"
PW-2-190	190	720	24	48	48	3/4	3.2	4"	3"
PW-2-300	300	1135	36	48	48	2	7.5	4"	3"

